



Sony Xperia Sola Disassembly

Brief summary of how to proceed to the removal of the terminal.

Written By: ELIAS TRUJILLO






TOOLS:

- [Heads: PH000 and T5](#) (1)
-

Step 1 — Sony Xperia Sola Disassembly

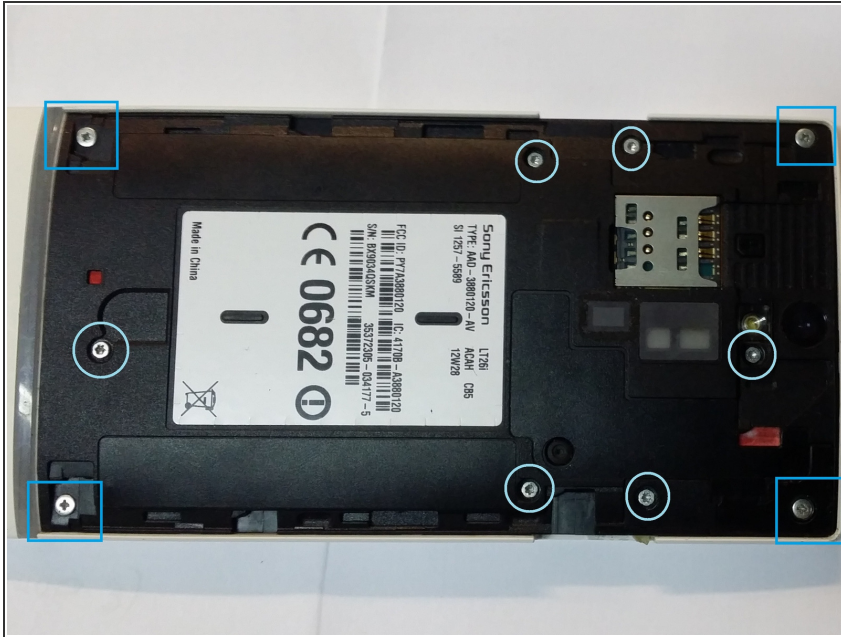


- The next step is to remove the first white cap or cover that protects the system from beatings but not water. Once we remove the white cap, we found a sustained covered by a total of 10 screws, 4 star tronillos head PH000 and other hexagonal head 6 T5. Here's how to stay:

Step 2




- The next step now is, once the screws removed, lift using a plectrum or any object that prevents deterioration terminal to lift the black cover. The problem with this is that it is connected to the inside of the terminal by a bus (indicated in the photo).

Step 3

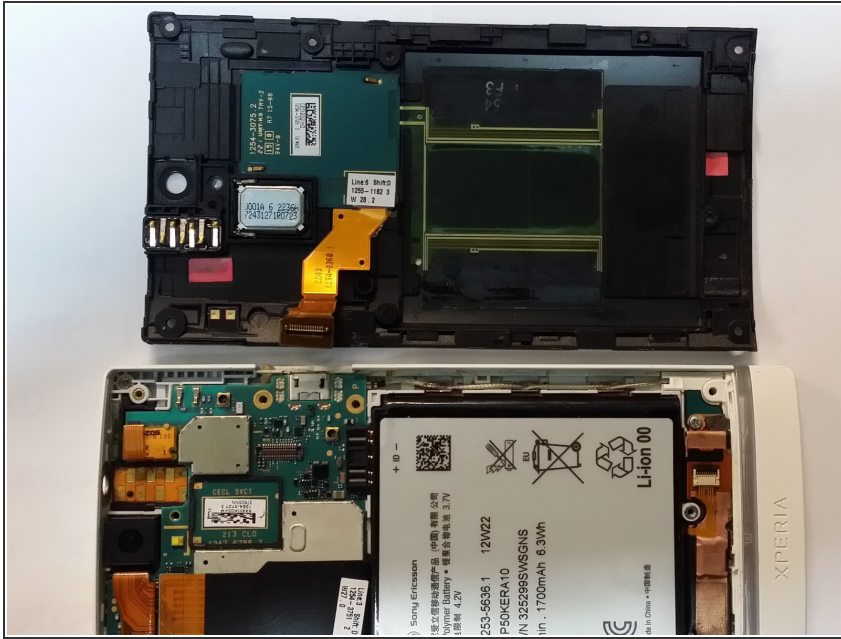


- Bus and removed the black cover aside to let the air getting motherboard terminal.

Step 4

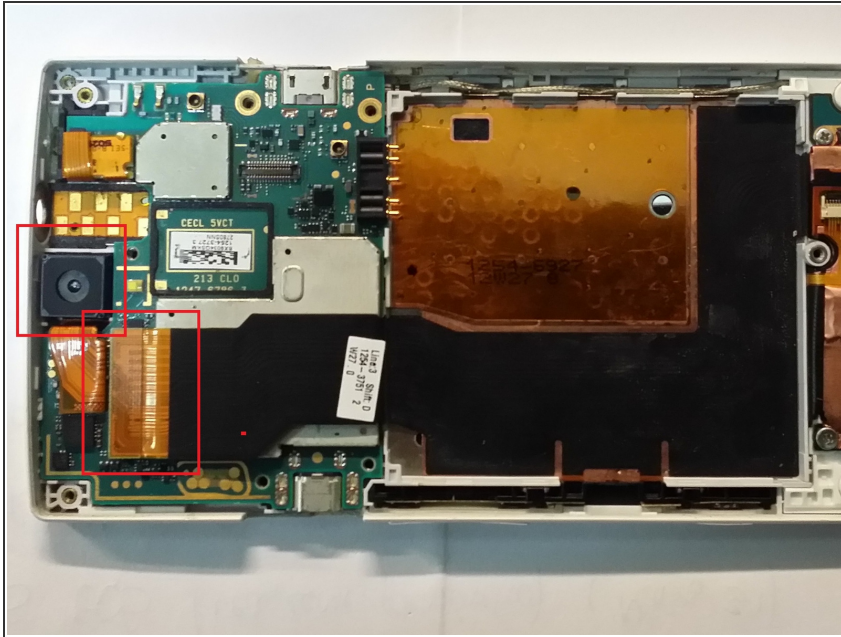


- It is time to remove the battery from it. Once done we will focus on extracting the bus connecting the terminal to the base plate (picture below). We would apply the same procedure as the previous bus, and leave some pressure itself.

Step 5

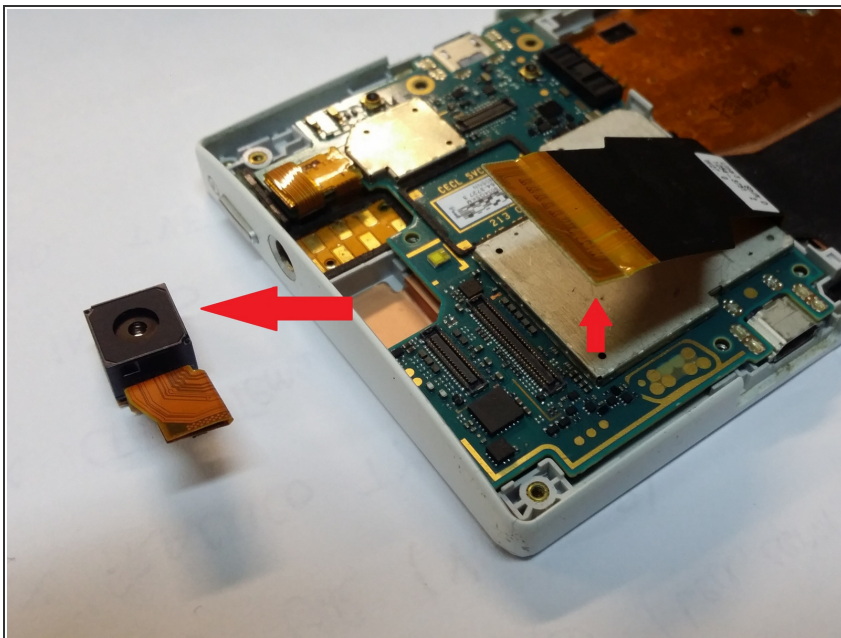

- Once you unhooked the buses we will be able to remove the camera:

Step 6

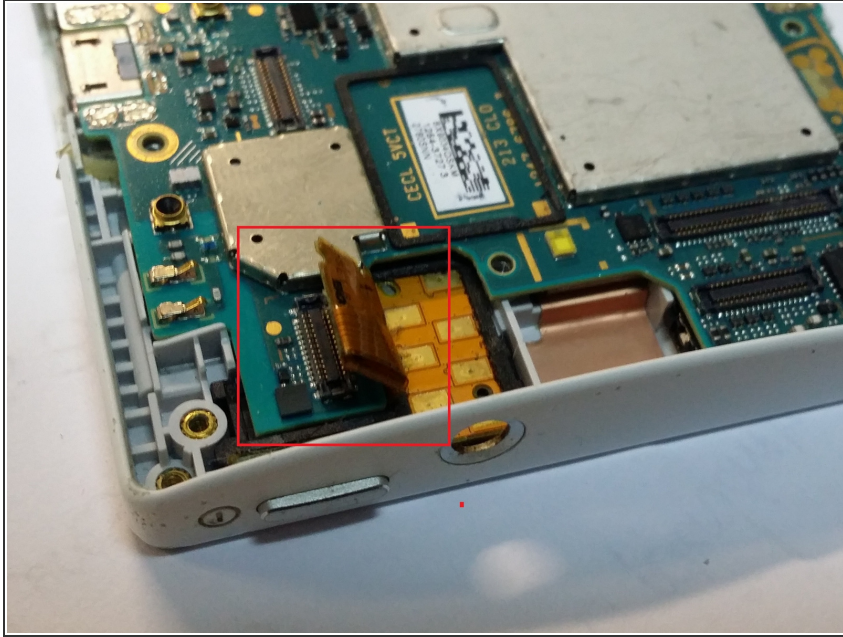

- Finally, we will remove the closest to the camera bus. This is just below the button on / off. (Next picture):

Step 7



- Already achieved this and a problem of any reason it did not happen, we will have the ease of removing the motherboard leaving the terminal being completely disassembled this:

Para reensamblar tu dispositivo, sigue estas instrucciones en orden inverso.

This document was last generated on 2017-06-17 02:53:40 AM.